


LINEAR TRAY SEALER




LINCON
series



**Designed for
Start ups**




**Linear Table
Movement**



**Space Saving
Design**





**Hygienic & Safe
Design**



**MAP Tray
Sealing**



**Secured
Sealing**

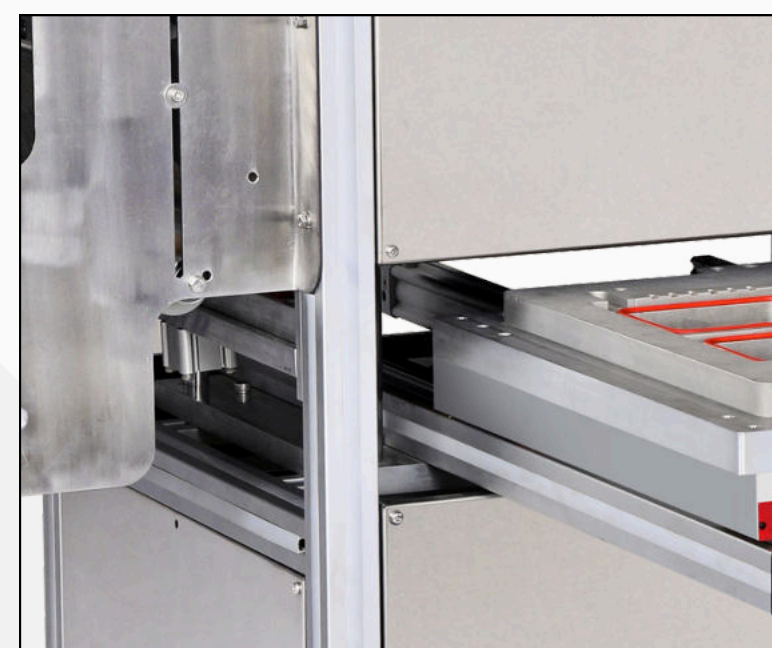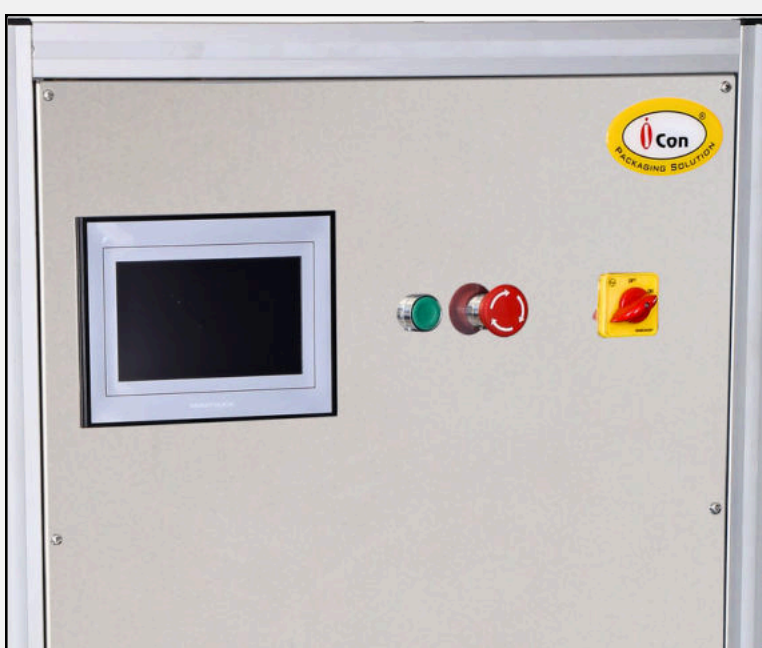

A Linear Tray Sealer machine is a semi-automated packaging system designed for startups, ideal for small-scale production. It offers precise sealing with consistent quality, accommodating various tray sizes and materials. It removes air from the package to extend shelf life by reducing exposure to oxygen, preserving freshness and preventing spoilage.

The Linear Tray Sealer features quick-change tooling, enabling fast and easy transitions between different tray sizes for versatile production needs.

The application is to preserve foods like sweets, dairy products, meat, seafood, dates, dry fruits & convenience foods etc.

Easy to Operate

Designed with simplicity, our machine features an intuitive smart interface and straightforward controls, ensuring easy operation for all experience levels.


Easy Maintenance

With a focus on convenience, our machine is engineered for easy maintenance, featuring accessible components and straightforward service procedures.

Rapid Tech Support

Benefit from our 24*7 rapid tech support, offering prompt assistance and solutions to minimize downtime and keep your machine running smoothly.

DIMENSIONS

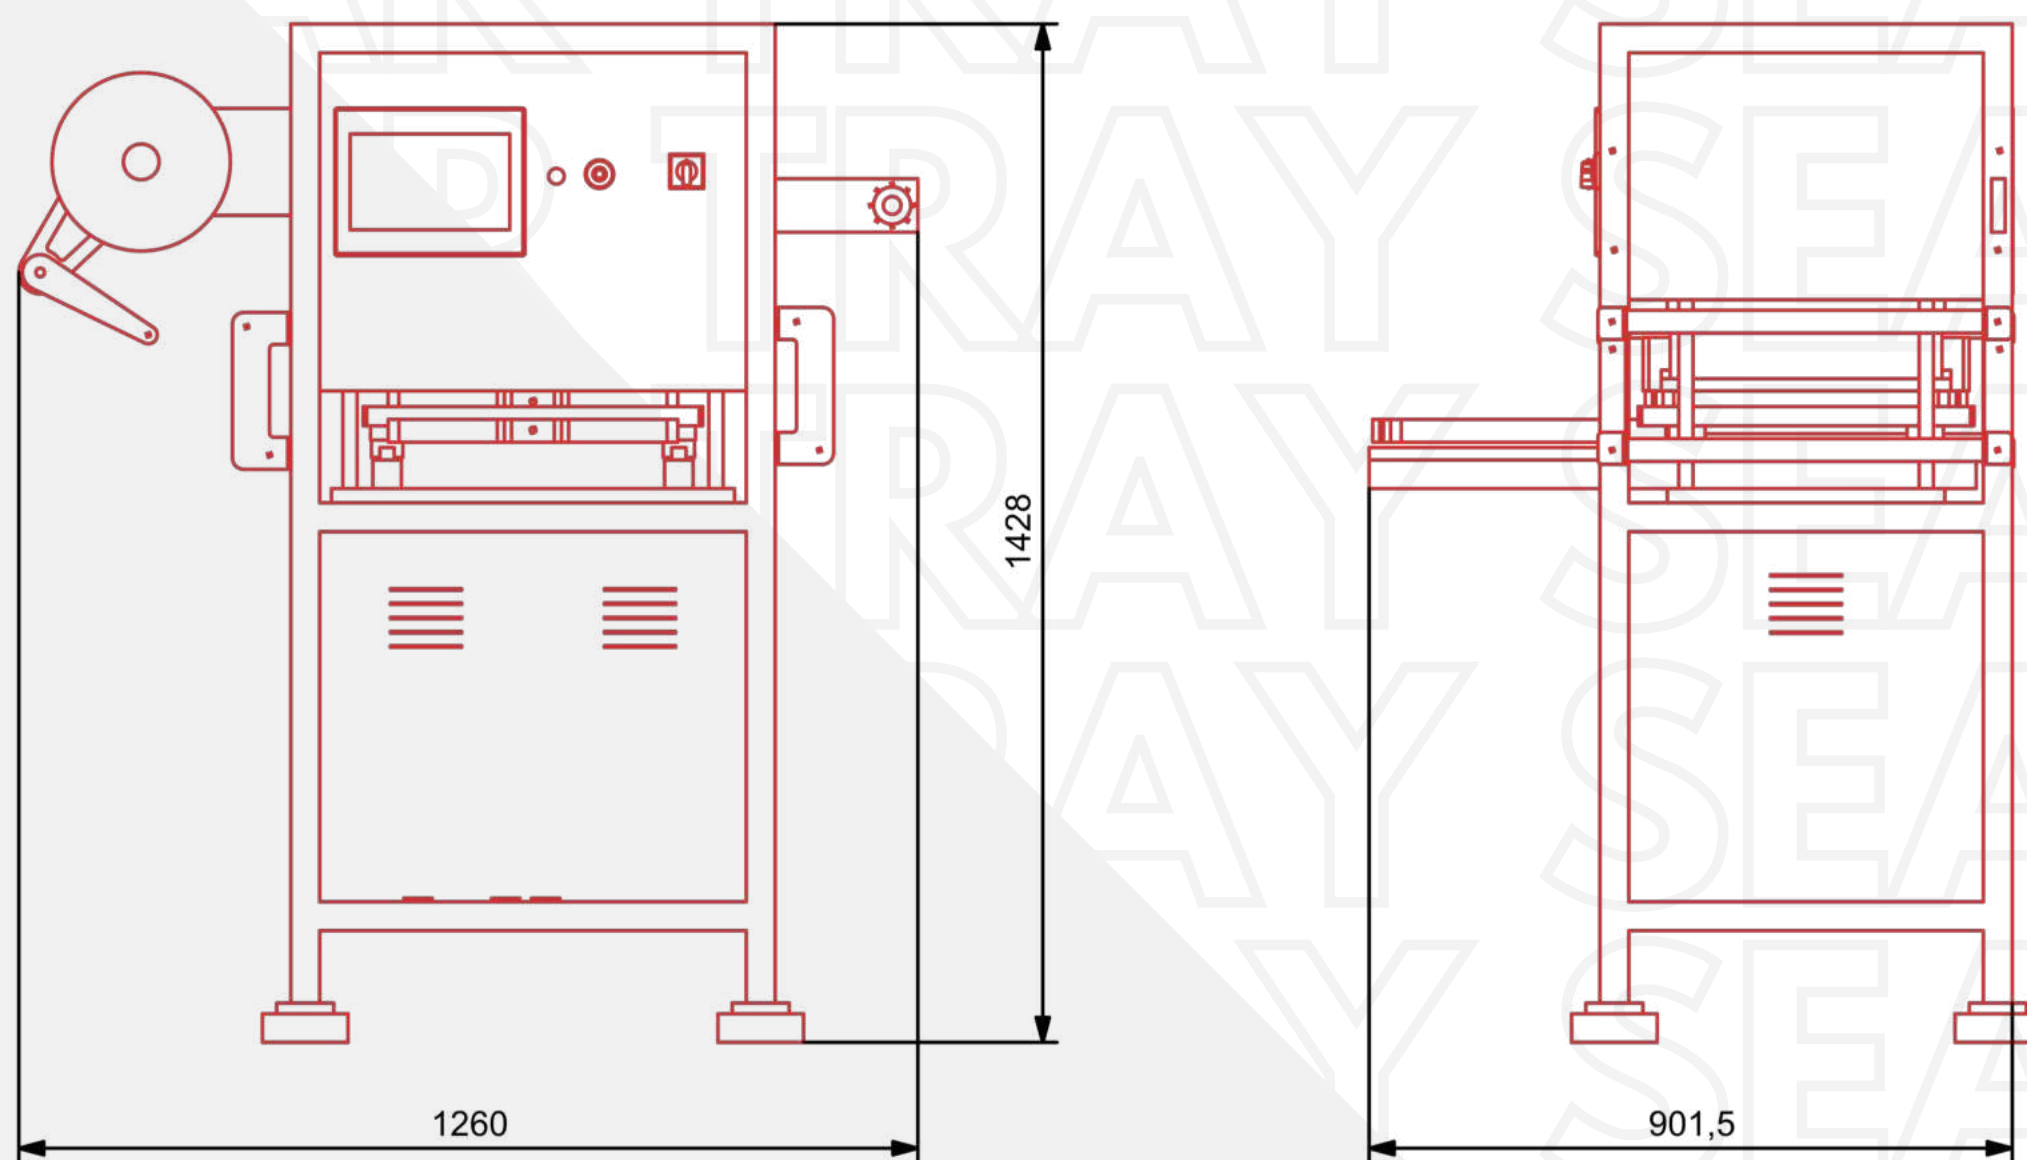

LINCON⁴

TECHNICAL SPECIFICATIONS

Production Capacity	Up To 3-5 Cycles Per Minute	Pneumatic Components	SMC
Products	Meats, Sweets & Savories, Bakery	Control & Command System	PLC Touch Screen (Fuji)
Upper Film	Printed / Plain	Application	MAP, Sealing
Tray Material	Rigid And Heat Sealable	Machine Length	~ 902 mm
Tray Shape	Customized	Machine Width	~ 1260 mm
Machine Construction	Stainless Steel 304 & Aluminum Assemblies	Machine Height	~ 1428 mm
Total Installed Power	7 KW (Thermoforming Machine) 4 KW (Air Compressor (5 H.P.) 1 KW (Chiller) 1 KW (Stabilizer & Air Dryer)	Machine Weight	~ 240 Kg.
Vacuum Pump	Busch / Becker	Require Air Compressor	3 H.P.
		Require Air Pressure	6 To 7 Bar

*The above mentioned values are indicative and can be modified at any time at the discretion of the company.